


EVOline® CableManagement



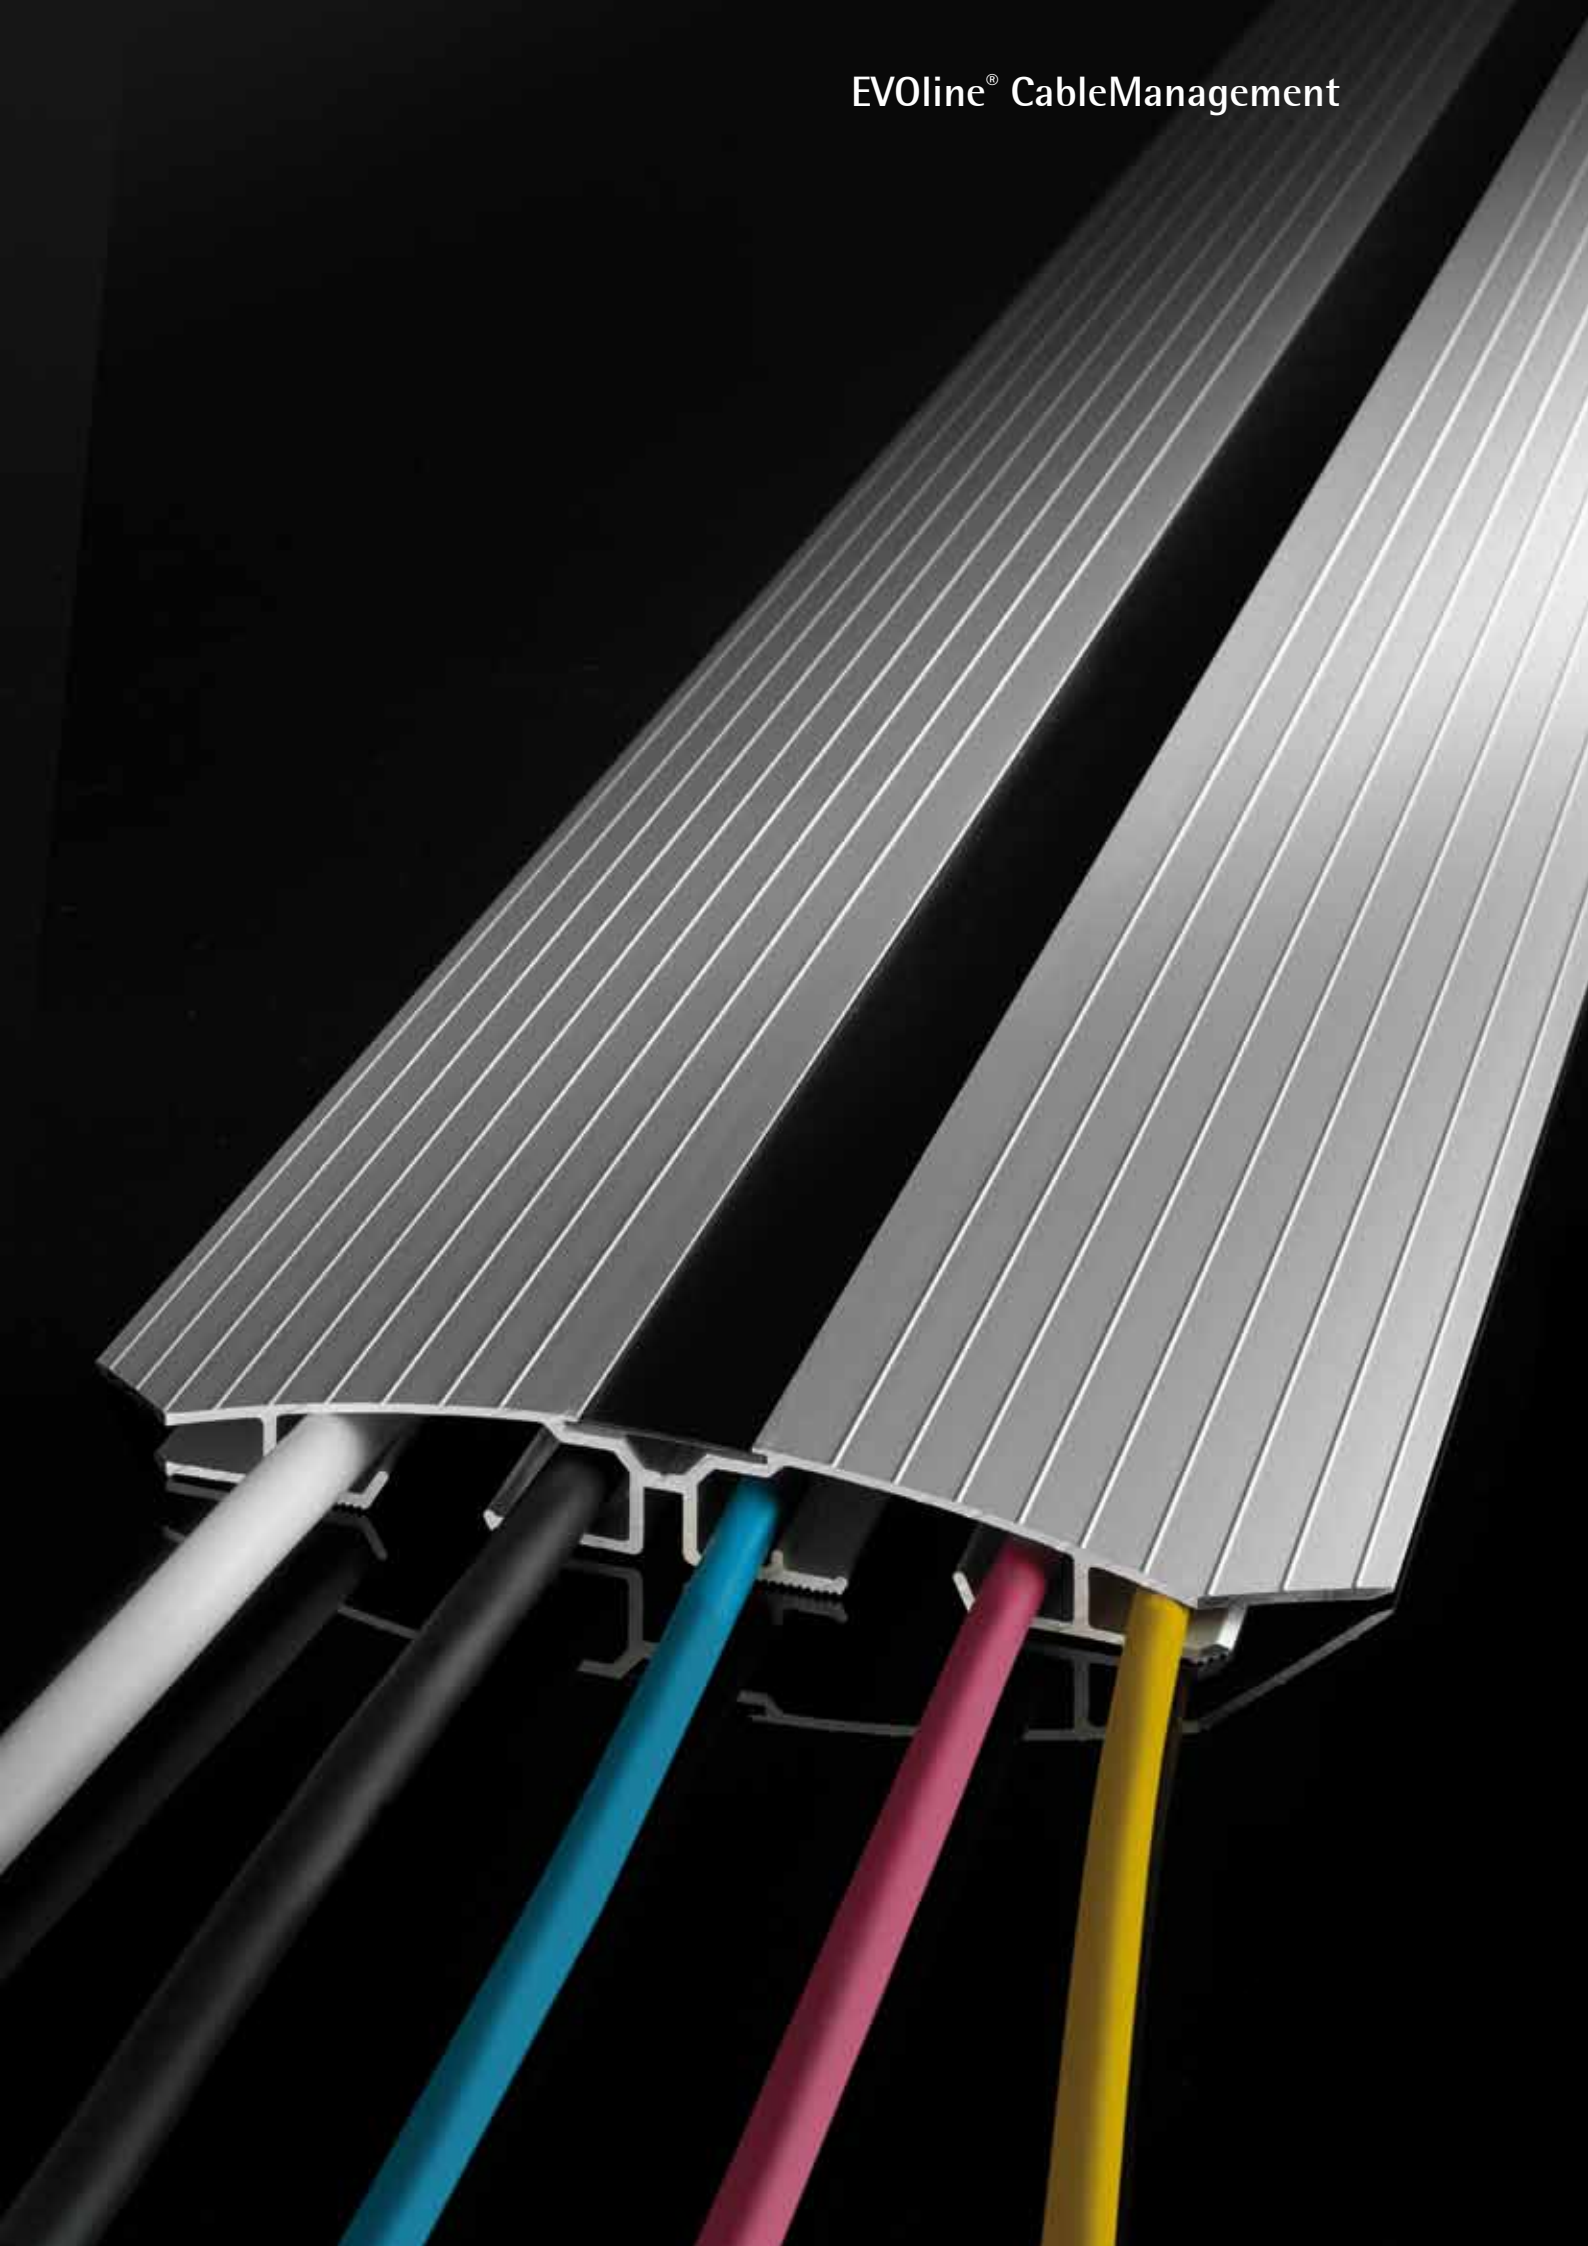


EVoline® CordTrack

Robust profile for cable distribution to be fastened to the floor. Simple access by removable cover. Separate cable channels for power and data.

EVoline® CordTrack Distributor

for CordTrack Profile. Four directions simultaneously or as connection for EVoline® WireLane.

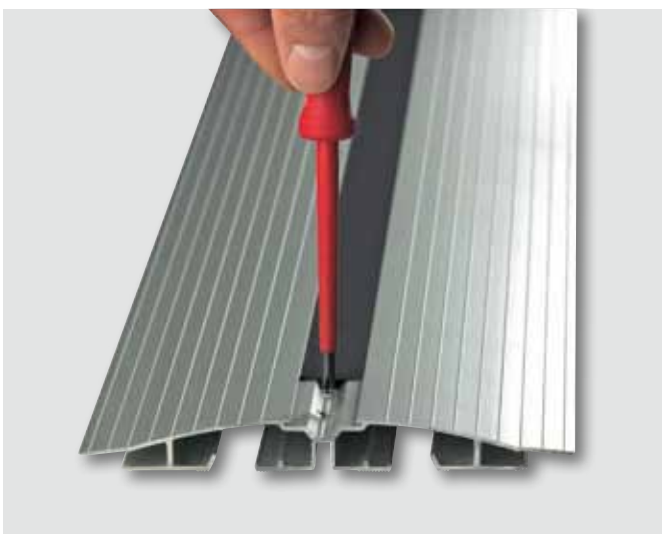

EVoline® Bridge

Solid Aluminium. Screw or glue fixing on all types of flooring. Cables channeled. Separate power and data sections. Dangers of tripping reduced. Durable quality. Resistant to UV. Made to measure on request.

Innovative solutions for problems familiar to everyone.



EVOLine® CableManagement



EVOLine® WireLane

Clean cable guidance underneath table.
Simple clipping of cables in separate chambers.
Flexible, rotatable.
In Black or Grey.
Fits EVOLine® CordTrack distributor.



EVOLine® WireLane Connector

Securing of cables simply by screwing.
Strain relief.
Cables separated.
Technically sound.














EVOLine® CableFlex

Bundling of cables as easy as never before.
Various diameters.
Insertion and removal with CableFlex tool.

Article	Picture	Specification	Type
<p>Cable aperture EVoline® FlipTop SMALL for installation in countertops from 19 mm to 35 mm thickness. Hinged lid with end stop and adjustable open position snap-in points. Black brush strip, Installation aperture dimension: 185 x 157 mm</p>		<p>Housing and lid brushed Stainless Steel</p> <p>Housing and lid made of Stainless Steel, lacquered, black or white</p> <p>Please specify your desired colour when placing the order.</p>	<p>1593 4204 0300</p> <p>1593 4204 5400</p>
<p>Cable aperture EVoline® FlipTop MEDIUM for installation in countertops from 19 mm to 50 mm thickness. Hinged lid with end stop and adjustable open position snap-in points. Black brush strip, Installation aperture dimension: 235 x 157 mm</p>		<p>Housing and lid brushed Stainless Steel</p> <p>Housing and lid made of Stainless Steel, lacquered, black or white</p> <p>Please specify your desired colour when placing the order.</p>	<p>1593 4202 7400</p> <p>1593 4204 5500</p>
<p>Cable aperture EVoline® FlipTop LARGE for installation in countertops from 19 mm to 50 mm thickness. Hinged lid with end stop and adjustable open position snap-in points. Black brush strip, Installation aperture dimension: 335 x 157 mm</p>		<p>Housing and lid brushed Stainless Steel</p> <p>Housing and lid made of Stainless Steel, lacquered, black or white</p> <p>Please specify your desired colour when placing the order.</p>	<p>1593 4204 0400</p> <p>1593 4204 5700</p>
<p>Cable aperture, reaching through table EVoline® SubDesk</p> <p>consisting of:</p> <p>lid, table insert and template</p>		<p>Silver lacquered</p> <p>Black lacquered</p>	<p>1593 4109 9900</p> <p>1593 4119 9900</p>
<p>Cable aperture in EVoline® Port - Design</p>		<p>Rocking cover and sleeve made of plastic, lacquered in Silver colour</p>	<p>1593 1002 5300</p>
<p>Cable aperture in EVoline® Port - Design</p>		<p>Rocking cover and sleeve made of plastic, lacquered in Black colour</p>	<p>1593 1003 2600</p>
<p>Cable aperture in EVoline® Port - Design</p>		<p>Rocking cover made of Stainless Steel in CD Optic and sleeve made of plastic lacquered in tone</p>	<p>1593 1003 2700</p>

EVoline® CableManagement

Article	Picture	Specification	Type
EVoline® Floor Outlet Floor inlet/outlet cable aperture for installation in double and hollow floors construction made of halogen free polyamide. Assembly through installation aperture (112 mm diameter)		plastic, Grey floors to be cleaned dry	6599 2000 4000
		floors to be cleaned wet	6599 2000 4100
		plastic, Black floors to be cleaned dry	6599 2000 4200
		floors to be cleaned wet	6599 2000 4300
EVoline® Bridge Aluminium cable link can be fixed with screws (screws not included in delivery) with decorative Black trim		with four cable clips Length 500 mm Length 800 mm Length 1.200 mm	1593 5010 5000
			1593 5010 8000
			1593 5011 2000
EVoline® Bridge Aluminium cable link with double sided tape with decorative Black trim		with eight cable clips Length 1.600 mm Length 2.000 mm	1593 5011 6000
			1593 5012 0000
EVoline® Bridge Aluminium cable link with double sided tape with decorative Black trim		with four cable clips Length 500 mm Length 800 mm Length 1.200 mm	1593 5020 5000
			1593 5020 8000
			1593 5021 2000
EVoline® Bridge Aluminium cable link with double sided tape with decorative Black trim		with eight cable clips Length 1.600 mm Length 2.000 mm	1593 5021 6000
			1593 5022 0000
EVoline® CordTrack Aluminium Floor Duct can be fixed with screws (screws not included in delivery) Aluminium floor duct with two chambers		Length 500 mm Length 800 mm Length 1.200 mm Length 1.600 mm Length 2.000 mm	6593 5100 5000
			6593 5100 8000
			6593 5101 2000
			6593 5101 6000
			6593 5102 0000
EVoline® CordTrack Distributor		Distribution box for EVoline® CordTrack	6593 5190 0100

Article	Picture	Specification	Type
EVOLine® WireLane Duct underneath table Can be fixed with screws can be joined successively flexible		Length 650 - 1,000 mm	6593 5201 0000 6593 5211 0000
		Plastic Black	
		Plastic Grey	
EVOLine® WireLane Strain relief in plastic Black RAL 7021 with two clamps for cables		provision for WireLane	6593 5290 0100
EVOLine® CableFlex Tube for cables in plastic for bundling loose cables, Black, including tool		Diameter 15 mm, length: 50 m	6593 5300 0100
		Diameter 20 mm, length: 30 m	6593 5310 0100
		Diameter 25 mm, length: 20 m	6593 5320 0100
EVOLine® CableFlex tool Insertion/Removal tool		Diameter 15 mm	6593 5390 0100
		Diameter 20 mm	6593 5390 0200
		Diameter 25 mm	6593 5390 0300

EVOLine® CableManagement

