

EVoline® FlipTop Push



A touch of a finger is sufficient.

EVoline® FlipTop Push


The FlipTop Push is an elegant solution supplying all work areas with power, data and multimedia.

Interchangeable modules for data and multimedia ensure unlimited flexibility for future requirements at the workspace.


Push-to-open function.
Final open position with
locking mechanism allows
easy insertion of plugs.



Quick installation

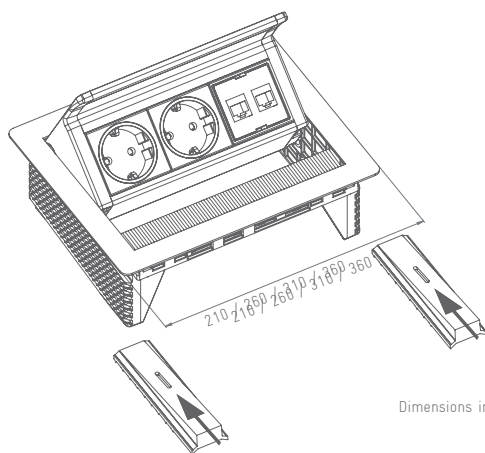

Dimensions in mm.

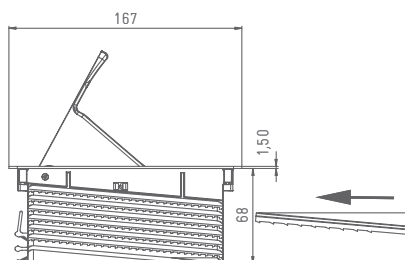

International power socket modules



Simple and quick exchange of modules. Customisable with interchangeable modules.



Interchangeable
Modules
see page 122



Flexible,
exchangeable
cable outlet
module

Quick installation,
for surface thickness
up to 50 mm





Adaptor clip for safe
connection to WireLane



Convenient cable routing
ensures tidiness below
the table



EVoline® FlipTop Push

Description	Picture	Specifications	Order Number
<p>EVoline FlipTop Push S</p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7002 4900
<p>EVoline FlipTop Push Data S</p> <p>Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7002 8100

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVOLine FlipTop *Push* M

4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. For surface thickness up to 50 mm.



Housing made of black anodised aluminium,
Cover and frame top made of brushed stainless steel

1593 7000 2700

Installation dimensions:
157 × 245 mm

EVOLine FlipTop *Push* Data M

3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. For surface thickness up to 50 mm.









Housing made of black anodised aluminium,
Cover and frame top made of brushed stainless steel

1593 7000 0200

Installation dimensions:
157 × 245 mm

EVoline® FlipTop *Push* Individual

Description	Picture	Specifications	Order Number
<p>Empty Housing EVoline FlipTop <i>Push</i> S</p> <p>For 3 modules Housing made of black anodised aluminium, For work surface thickness up to 50 mm. Installation dimensions: 157 × 195 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8010 0000</p> <p>9331 9360 0000</p> <p>9331 9630 0000</p>
<p>Empty Housing EVoline FlipTop <i>Push</i> M</p> <p>For 4 modules Housing made of black anodised aluminium, For work surface thickness up to 50 mm. Incl. WireLane Adaptor Installation dimensions: 157 × 245 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8020 0000</p> <p>9331 9370 0000</p> <p>9331 9640 0000</p>
<p>Empty Housing EVoline FlipTop <i>Push</i> L</p> <p>For 5 modules Housing made of black anodised aluminium, For surface thickness up to 50 mm. Incl. WireLane Adaptor Installation dimensions: 157 × 295 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8030 0000</p> <p>9331 9380 0000</p> <p>9331 9650 0000</p>
<p>Empty Housing EVoline FlipTop <i>Push</i> XL</p> <p>For 6 Modules Housing made of black anodised aluminium, For surface thickness up to 50 mm. Incl. WireLane Adaptor</p> <p>Installation dimensions: 157 × 345 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8040 0000</p> <p>9331 9390 0000</p> <p>9331 9660 0000</p>

Description	Picture	Specifications	Order Number
<p>EVoline WireLane Adaptor</p> <p>To connect WireLane to FlipTop <i>Push</i>.</p>		black	1599 0910 3300
<p>EVoline FlipTop <i>Push</i> TRAY</p> <p>black powder-coated. For protection and cover below the table. Also applicable as cable tray.</p>		<p>for FlipTop <i>Push</i> S</p> <p>for FlipTop <i>Push</i> M</p> <p>for FlipTop <i>Push</i> L</p> <p>for FlipTop <i>Push</i> XL</p>	<p>9331 9100 0000</p> <p>9331 9110 0000</p> <p>9331 9120 0000</p> <p>9331 9130 0000</p>

