

EVOnline[®] U-Dock





Underdesk. Robust. Save.



EVoline[®] U-Dock

EVoline U-Dock can be mounted to any work surface in various ways.




As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data modules as well as safety devices for protection of personnel and machinery.

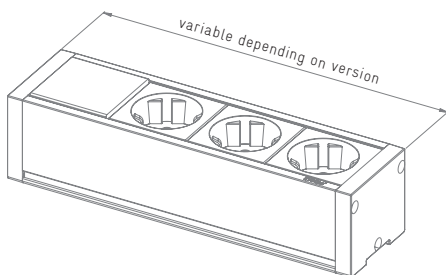

Examples of power supply options:





End cap with power input and/or output connector.

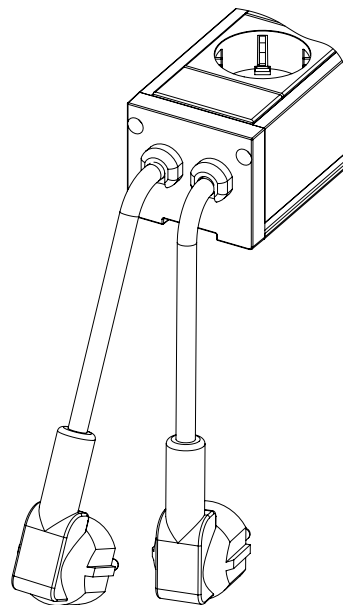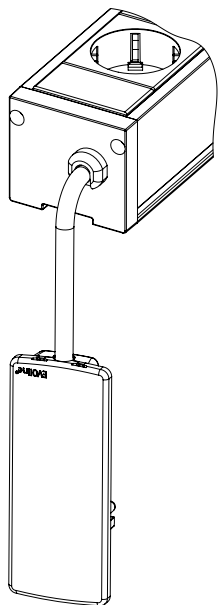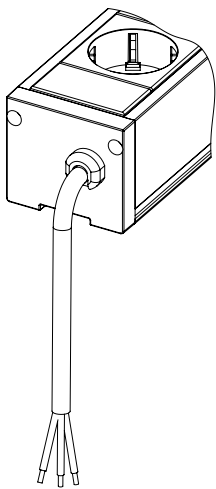

End cap with fixed power supply cable.



Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

End cap colour: black



All above mentioned U-Dock end caps are available with or without mounting angles.

EVoline® U-Dock

Description	Picture	Specifications	Order Number
<p>EVoline U-Dock SMALL</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input- and output connector GST18i3 plug and GST18i3 socket.</p>		<p>Silver anodised with mounting angles</p>	1596 0000 9500
		<p>Silver anodised without mounting angles</p>	1596 0000 9600
<p>EVoline U-Dock DATA SMALL</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input- and output connector GST18i3 plug and GST18i3 socket.</p> <p>Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Entry for data cables in the opposite end cap.</p>		<p>Silver anodised with mounting angles</p>	1596 0000 5900
		<p>Silver anodised without mounting angles</p>	1596 0000 3300

EVoline® U-Dock Individual

<p>Empty Housing EVoline U-Dock</p> <p>Aluminium housing</p>		<p>Silver anodised</p> <p>End caps optionally with or without mounting angles</p>	9330 8510 0000
---	---	---	----------------

Configuration Examples:

