

# EVoline® V-Port



reddot design award  
winner 2015



DESIGN  
AWARD  
2015



GERMAN  
DESIGN  
AWARD  
SPECIAL  
2016




Connectivity for corners everywhere.

# EVoline® V-Port

In kitchens, you often find unused space underneath a wall cabinet, in corners and next to tall cupboards. This is where the EVoline V-Port can be installed.

In its closed position, the V-Port is concealed behind a discreet and elegant aluminium cover in stainless steel optics. A gentle touch releases a multiple socket rail. As option available with USB charger.

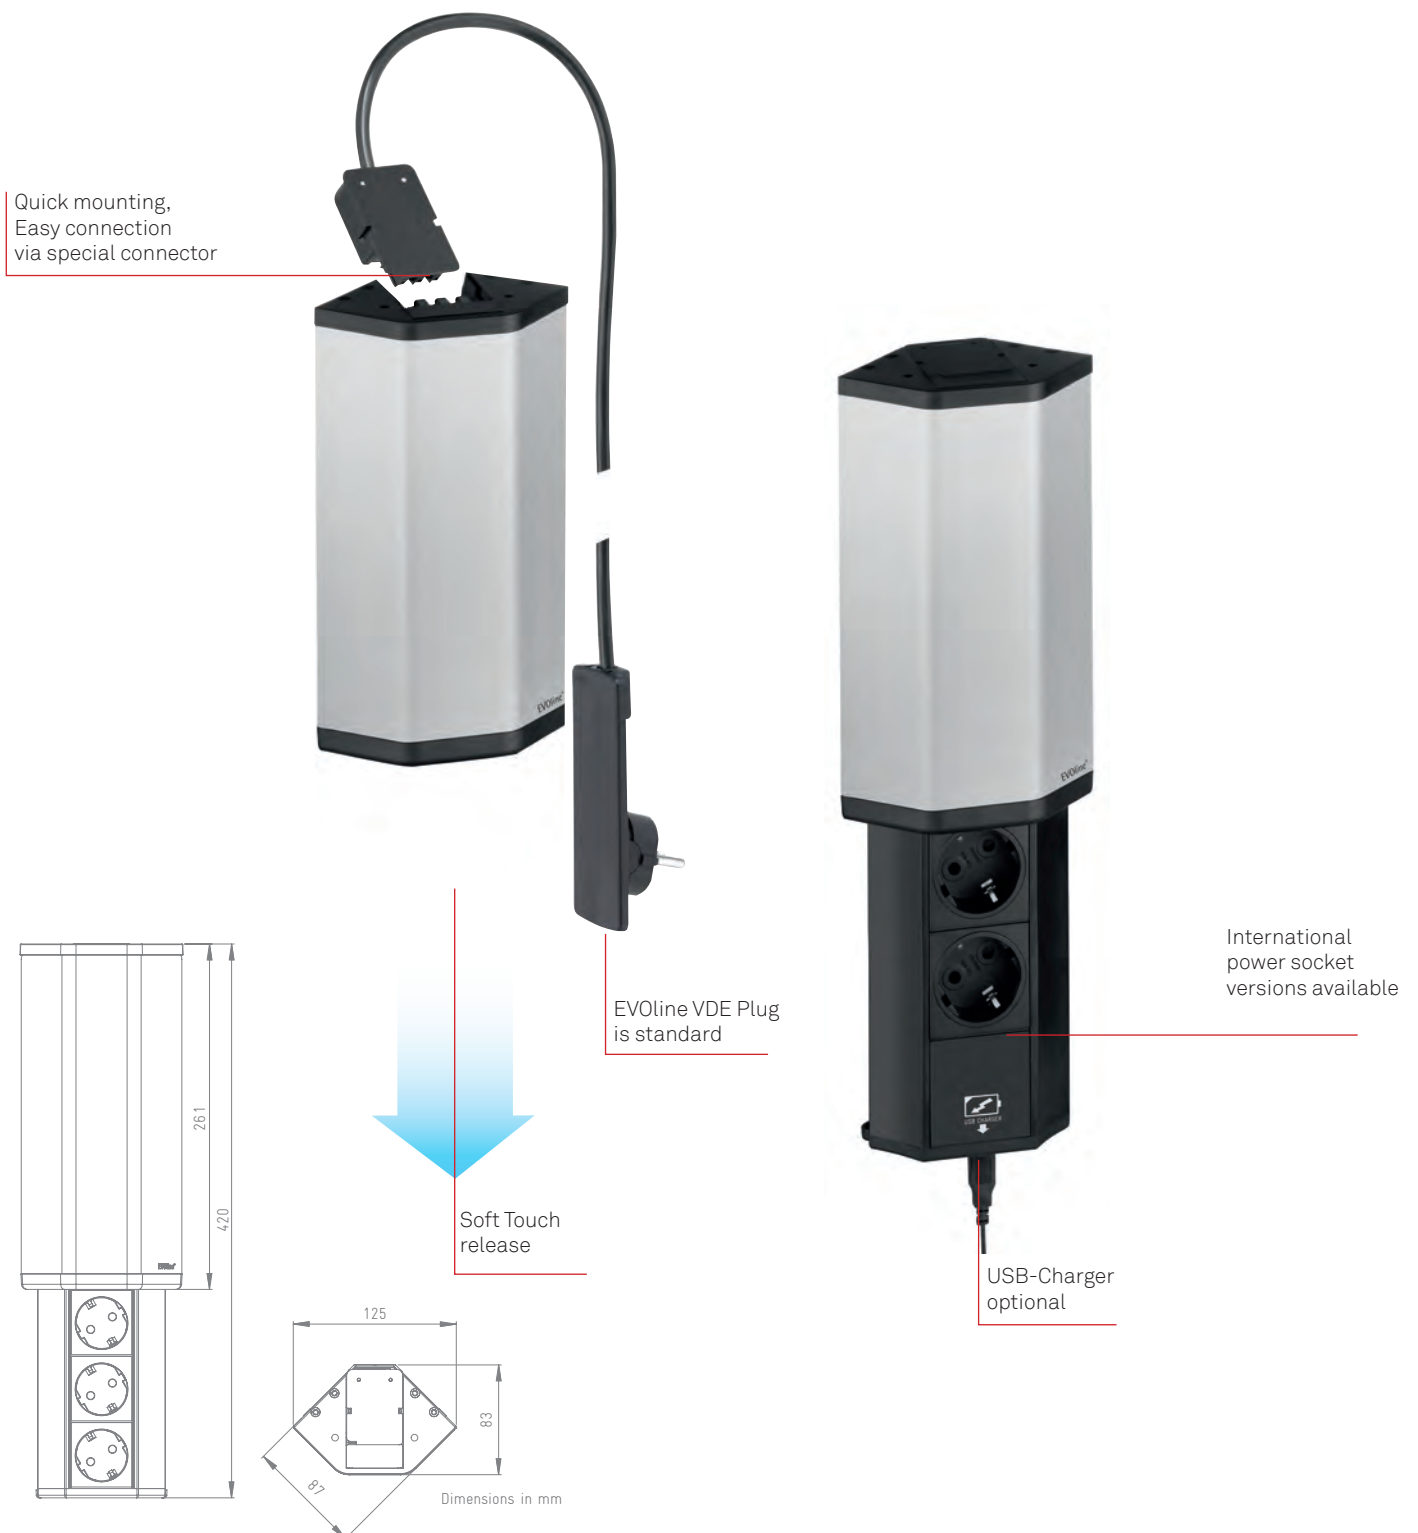

Description	Picture	Specifications	Order Number
<p><b>EVoline V-Port</b> 2-gang</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 2× VDE-compliant socket, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0200</p>
<p><b>EVoline V-Port</b> 3-gang</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 3× VDE-compliant socket, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0100</p>
<p><b>EVoline V-Port</b> 2-gang with USB-Charger*</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 2× VDE-compliant sockets, 60°, 16 A, contact-protected. Supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p> <p>1x USB Type A Charger, rated output current: 1 A,</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0300</p>

\* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

